








SureShipper

Fully Automatic
Top & Bottom Case Sealer

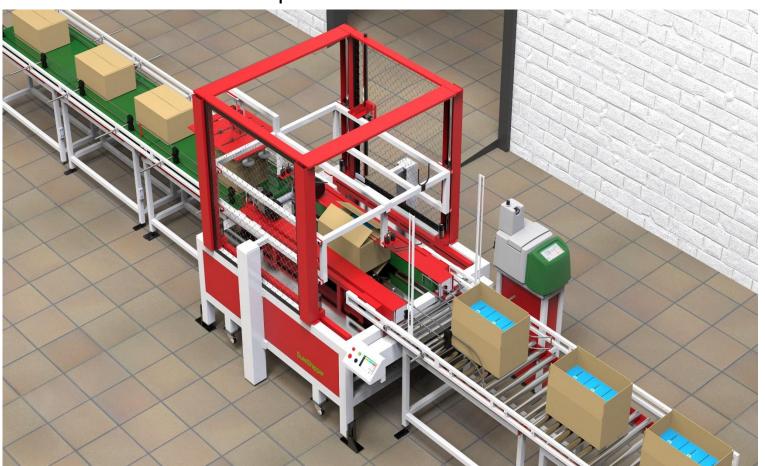







CONVEYING











PALLETIZING TERTIARY CONVEYING TRACE & TRACK

WAREHOUSE

TRUCK LOADING

Alan Scott Automation & Robotics Ltd.







Machine Description

BOPP tapes are widely used to seal Cartons. It does a good job, except for 2 serious problems

- Pilferage
- Usage of Plastic

Should the above limitations pose a problem to your organization, sweat no more. Reflex's **SureShipper** solves exactly these problems.

Instead of BOPP, **SureShipper** uses Hot Melt to securely bond the Major and Minor flaps of your shipper to ensure a 100% closure. Since the flaps are glued together, the shipper cannot be opened unless the flaps are torn apart. This ensure non-pilferage of your consignment.

Models Available: 9 Models to choose from

Shipper Size	Compact Width up to 200 mm	Regular Width 200 mm to 400 mm	Jumbo Width above 400 mm
Machine Flexibility			
Eco Multiple SKUs. Change time: 10 mins	Model 1 Compact Eco	Model 2 Regular Eco	Model 3 Jumbo Eco
Batch Multiple SKU Change time : 2 mins	Model 4 Compact Batch	Model 5 Regular Batch	Model 6 Jumbo Batch
Random Multiple SKU Automatic Change Over	Model 7 Compact Random	Model 8 Regular Random	Model 9 Jumbo Random

^{*} Please check applicability with model selected.

Alan Scott Automation & Robotics Ltd.







Machine Salient Feature *

1	Can speeds of up to 40 shipper per minute *	
2	IP42 design ensure trouble free running.	
3	Programmable Glue pattern	
4	Simple and robust escapement mechanism ensures perfect flow of shippers *	
5	Easy change-over between SKUs.	
6	Ingenious design ensures products do not fall off in spite of opening the bottom flaps*	
7	Customized modifications possible to handle very tricky products	
8	Indigenous design and manufacturing ensures all spares available locally.	
9	Use of high quality standard product ensures high reliability and ease in maintenance.	
10	All hot parts safely covered for operator safety	

Machine Technical Specifications

Technical Specification		
Speed	Up to 40 spm*	
Input conveyor height	800 mm	
Material of Construction	MS with Powder Quoting	
Power Supply	Single Phase 240 V AC	
Power Consumption	3 kW*	
Air Supply	6 bar	
Air Consumption	2 CFM*	


Alan Scott Automation & Robotics Ltd.







Machine Dimensions: "SureShipper Jumbo Batch" shown below.

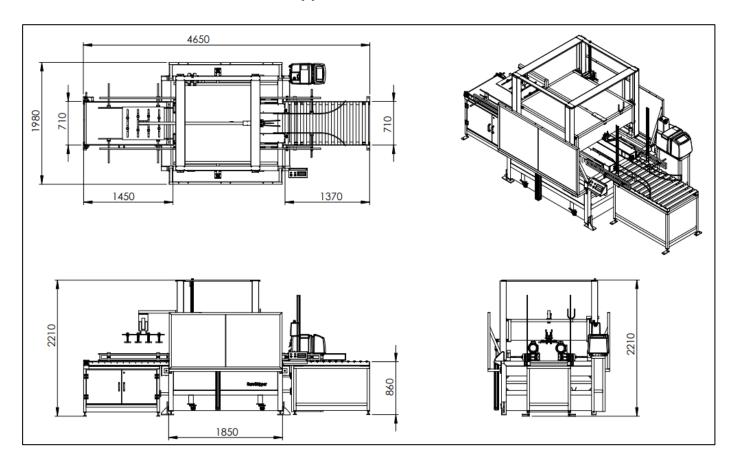

Note: The information contained herein is subject to change without notice. Customers are advised to verify the latest specifications from our representative

Page 4 of 4

V 1.1

Alan Scott Automation & Robotics Ltd.